

Focus on Pool & Landscape Water Treatment

BEYOKozone Inc.

GQW-P/GQO-P series Pool Ozone Generator

The GQW-P / GQO-P series of BEYOK pool ozone generators, can mix ozone into water to destroy bacteria and eliminate peculiar smell. The ozone generators have perfect automatic ozone production systems including oxygen generator or air pump, ozone system, cooling system and automatic control system. They are suitable for swimming pool, large food processing plants, canteen, sewage treatment, etc.

Features

- Wall mounted / skid-mounted / Portable / Mobile
- Compact design and simple operation
- Oxygen or dry air feed inside
- High efficiency
- Work continuously
- Gas-water mixing system
- Easy to maintain
- Economical, and low running costs
- Long working life



Benefits

- High efficient broad-spectrum sterilization
- Good dispersion
- Without ozone residual and secondary pollution

Application

- Disinfection: Swimming pool and small water treatment.
- Deodorization: basement, store room, hotel, central air-conditioning cooling tower.

About BEYOKozone


- Own more than 20 years' experiences
- Get more than 100 patents
- Covers an area of 1.3 hectares
- Located near Shanghai, good transportation
- ISO9001/14001/45001systems
- 1 million annual production capacity
- Have professional R&D teams
- Support OEM/ODM

Schematic Diagram

Unit: mm [inch]

GQW-P01U
Skid-mounted
Pipe connection




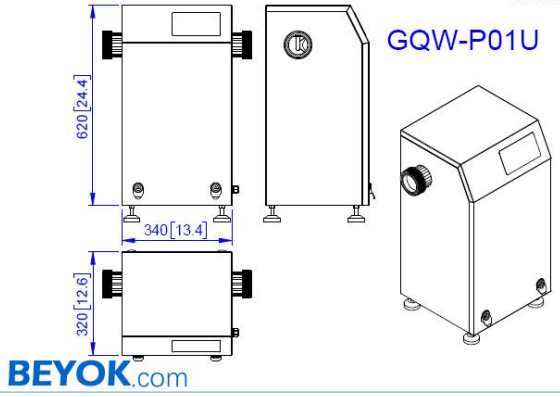

Unit: mm [inch]

GQW-P03V
Wall-mounted
Pipe connection




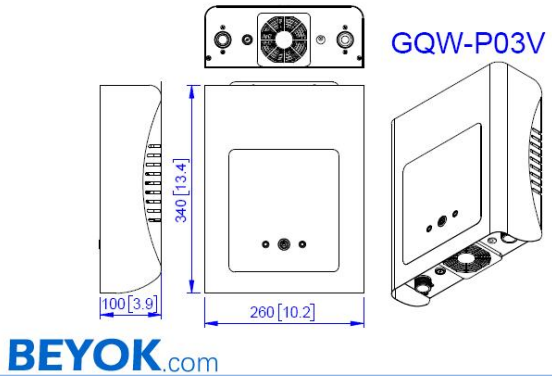

Unit: mm [inch]

GQW-P05M
Portable
Self suction cycle




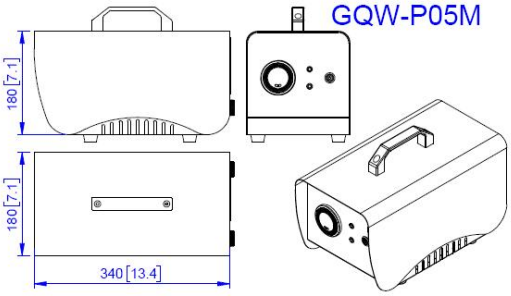

Unit: mm [inch]

GQW-P20C
Mobile
Self suction cycle



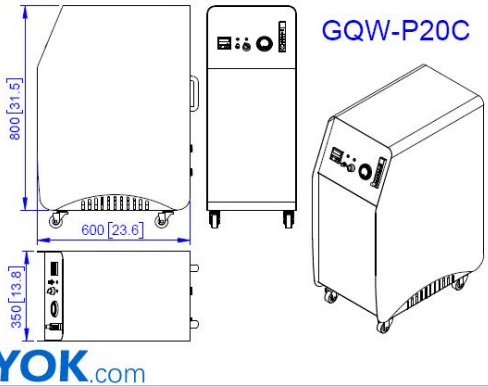

BEYOKozone Inc.
Address: No.398, Sandian Rd., Jiaxing, Zhejiang, China TEL: 0086-573-83888288
Website: www.ooozone.com Email：sales@ooozone.com


BEYOK OZONE
Focus on ozone generator & purifier system

GQW-P/GQO-P series Pool Ozone Generator


Parameters


Model:	GQW-P01U	GQW-P03V	GQW-P05M	GQW-P20C
Installation:	Skid-mounted	Wall-mounted	Portable	Mobile
Connection method:	Pipe connection		Self suction cycle	
Voltage:	220V/50Hz-120V/60Hz,			
Power:	80W	60W	500W	1100W
Disinfection method:	1gO3/hr & 50W UV	3gO3/hr@Injector	5gO3/hr@Injector	20gO3/hr@Mix pump
Control:	Water flow control		Program control	
Water Volume:	0.1mg/L@3-6TPH	1mg/L@0.5-1TPH	1mg/L@0.5TPH	2-4mg/L@1-3TPH
Water Connection:	DN50 PVC loose joint	G3/4" SS screw	G3/4" SS Quick Connector	
Case:	Stainless steel & Spray coating			
Dimension:	340*320*620 mm	260*100*340 mm	340*180*180 mm	600*350*800 mm
Net Weight:	22 kg	5 kg	5 kg	43 kg
Adapted pool:	200m3	30m3	50m3	200m3

Installation Diagram

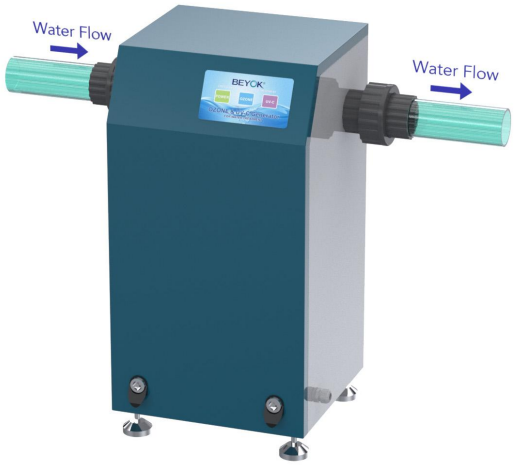



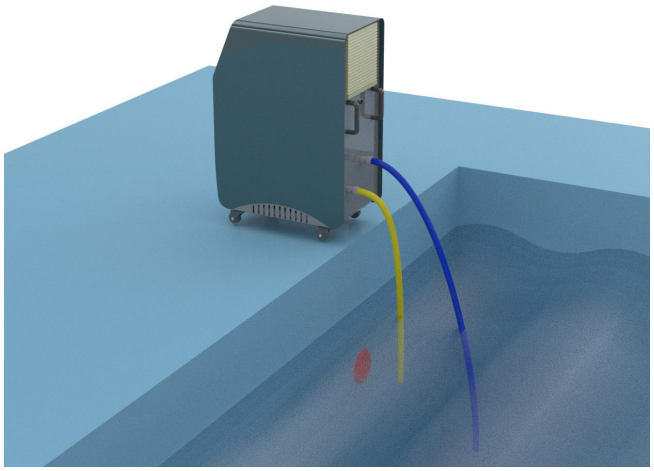

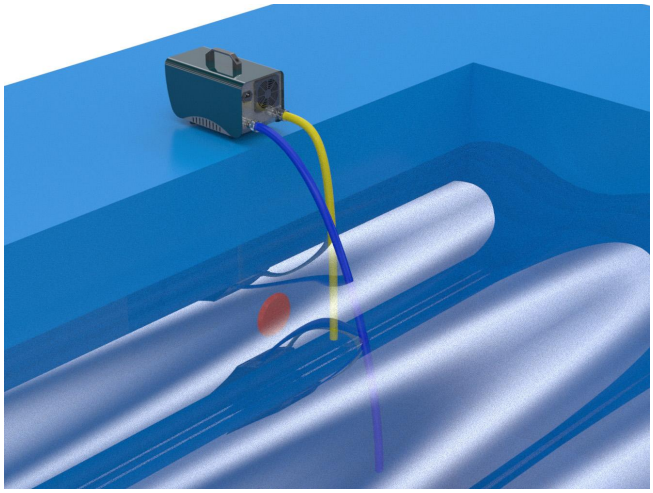


BEYOKozone Inc.
Address: No.398, Sandian Rd., Jiaxing, Zhejiang, China TEL: 0086-573-83888288
Website: www.ooozone.com Email：sales@ooozone.com

Schematic Diagram

GQO-P07V
5-10g/hr
Wall-mounted
Air pump inside




Unit: mm [inch]

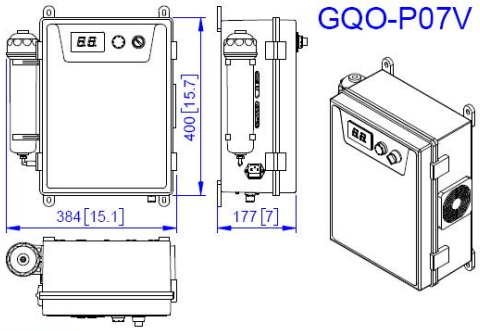

GQO-P15V
10-20g/hr
Wall-mounted
Air pump inside




Unit: mm [inch]

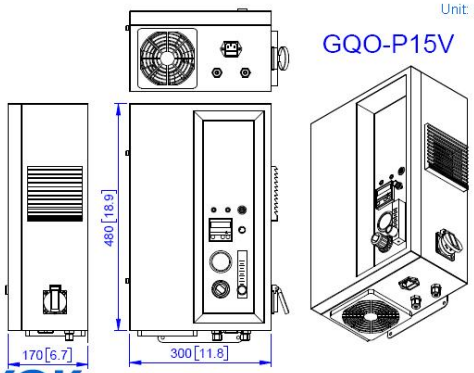

GQO-P20S
15-20g/hr
Skid-mounted
Oxygen inside




Unit: mm [inch]

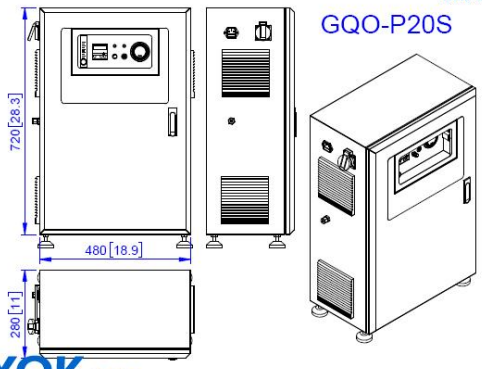

GQO-P50S
40-50g/hr
Skid-mounted
Oxygen inside



Unit: mm [inch]

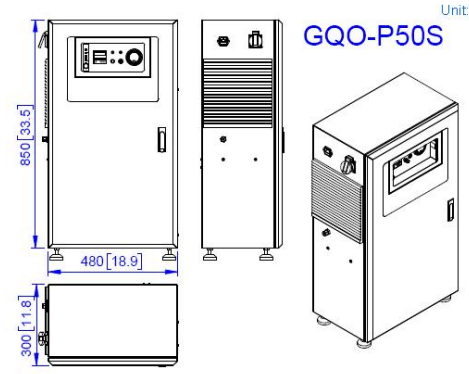


BEYOKozone Inc.
Address: No.398, Sandian Rd., Jiaxing, Zhejiang, China TEL: 0086-573-83888288
Website: www.ooozone.com Email：sales@ooozone.com


Parameters

Model:	GQO-P07V	GQO-P15V	GQO-P20S	GQO-P50S
Installation:	Wall-mounted		Skid-mounted	
Gas source:	Air pump inside		Oxygen generator inside	
Voltage:	220V/50Hz-120V/60Hz			
Power:	100W	220W	500W	1200W
Ozone Output:	5-10 g/hr@10Lpm	15-20 g/hr@20Lpm	15-20 g/hr@5L/min	40-50 g/hr@10Lpm
Control:	Timer control		Program control	
Connection:	8*6mm Stainless steel quick joint			
Ozone Injector:	HH-F40	HH-F50	HH-F25	HH-F40
Case:	Plastic	Metal	Metal	Metal
Dimension:	384*177*400 mm	300*170*480 mm	480*280*720 mm	480*300*850 mm
Net Weight:	9 kg	11 kg	43 kg	62 kg
Adapted pool:	100m3	200m3	300m3	600m3

Installation Diagram



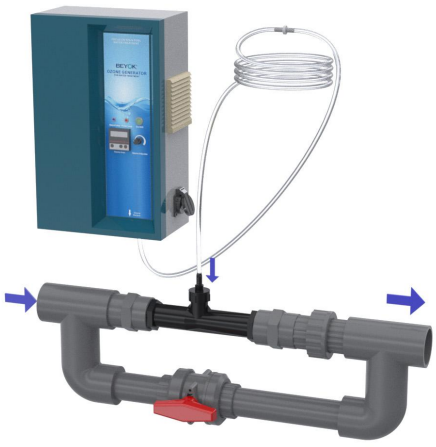

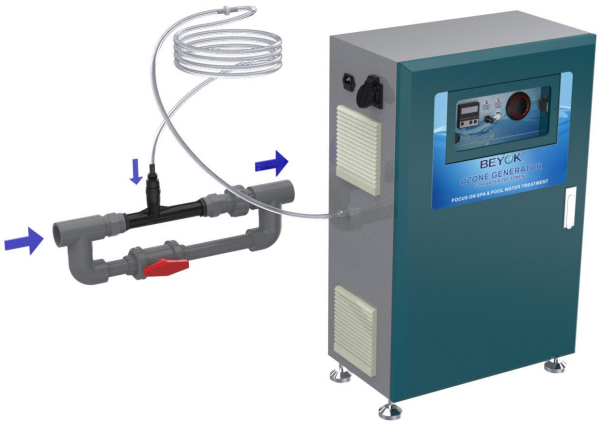





BEYOKozone Inc.
Address: No.398, Sandian Rd., Jiaxing, Zhejiang, China TEL: 0086-573-83888288
Website: www.ooozone.com Email：sales@ooozone.com

Venturi Injector Parameters

				
Model:	HH-F20	HH-F25	HH-F40	HH-F50
Material:	PVDF	PVDF	PVDF	PVDF
Water Flow:	0.5-1 CMH	1-3 CMH	3-6 CMH	6-10 CMH
Length (A):	5.9-in (149 mm)	9.1-in (230 mm)	10.6-in (270 mm)	11.4-in (290 mm)
Inlet (B):	(DN20) G3/4-in NPT	(DN25) G1.0-in NPT	(DN40) G1.5-in NPT	(DN50) G2.0-in NPT
Outlet (C):	(DN20) G3/4-in NPT	(DN25) G1.0-in NPT	(DN40) G1.5-in NPT	(DN50) G2.0-in NPT
Suction (D):	Φ8mm Barb	Φ8mm Barb	Φ12mm Barb	Φ12mm Barb
				
Model:		HH-P25	HH-P40	HH-P50
Material:		PVDF+PVC	PVDF+PVC	PVDF+PVC
Length (E):		19.5-in (495 mm)	26.5-in (672 mm)	34.3-in (872 mm)
Inlet (F):		(DN32) 1.2-in Pipe	(DN50) 2.0-in Pipe	(DN65) 2.5-in Pipe
Outlet (G):		(DN32) 1.2-in Pipe	(DN50) 2.0-in Pipe	(DN65) 2.5-in Pipe
Suction (H):		Φ8mm Barb	Φ12mm Barb	Φ12mm Barb

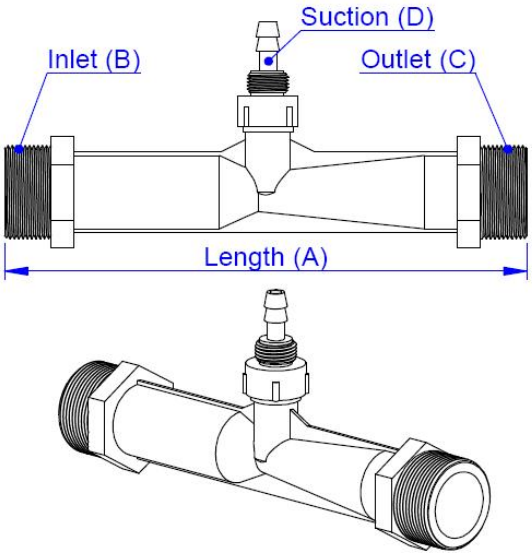

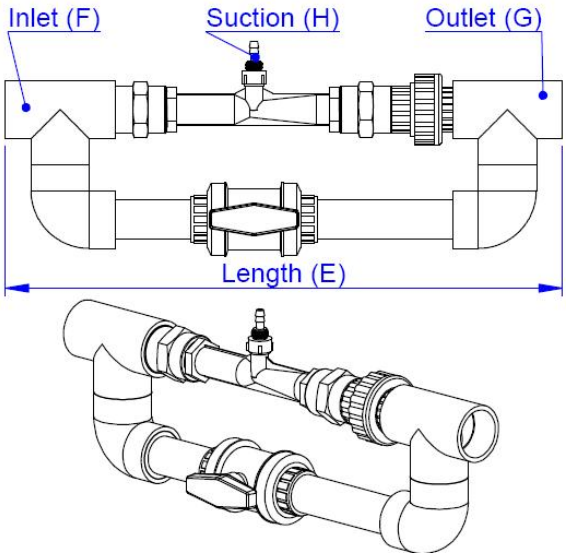

BEYOKozone Inc.
Address: No.398, Sandian Rd., Jiaxing, Zhejiang, China TEL: 0086-573-83888288
Website: www.ooozone.com Email：sales@ooozone.com

QUOTATION

Model	Item	Unit	EXW Unit Price (USD)	
			<100PCS	>100PCS
GQW-P01U	Pool ozone generator	pcs	US$1300.00	US$1200.00
GQW-P03V	Pool ozone generator	pcs	US$350.00	US$320.00
GQW-P05M	Pool ozone generator	pcs	US$420.00	US$400.00
GQW-P20C	Pool ozone generator	pcs	US$2000.00	US$1900.00
GQO-P07V	Pool ozone generator	pcs	US$230.00	US$215.00
GQO-P15V	Pool ozone generator	pcs	US$260.00	US$230.00
GQO-P20S	Pool ozone generator	pcs	US$1300.00	US$1200.00
GQO-P50S	Pool ozone generator	pcs	US$1700.00	US$1600.00
HH-F20	Ozone venturi injector	pcs	US$10.00	US$9.50
HH-F25	Ozone venturi injector	pcs	US$22.00	US$20.90
HH-F40	Ozone venturi injector	pcs	US$44.00	US$41.80
HH-F50	Ozone venturi injector	pcs	US$66.00	US$62.70
HH-P25	Ozone venturi injector	pcs	US$42.00	US$40.00
HH-P40	Ozone venturi injector	pcs	US$84.00	US$79.80
HH-P50	Ozone venturi injector	pcs	US$146.00	US$138.70

Note: 1. MOQ: 0-100PCS & >100PCS (each model)
2. 110V/60Hz, 220V/50-60Hz is available, other voltages please check with us.

PERIOD OF WARRANTY

Our products support one-year warranty after purchasing.

DELIVERY TIME

Within 15 days from the date of receiving T/T.

PAYMENT TERMS

100 % payment is needed before the delivery.

BEYOKozone Inc.
Address: No.398, Sandian Rd., Jiaxing, Zhejiang, China TEL: 0086-573-83888288
Website: www.ooozone.com Email：sales@ooozone.com